


1. Performance Specifications


RFID Chip	Alien H3		
Protocol	ISO/IEC 18000-6C, EPCglobal Class 1 Gen 2		
Operating Frequency	860~960MHz		
Operating Mode	Passive(Battery free)		
Memory	64 bit TID, 96 bit EPC, 512 bit User Memory	32Bits Access, 32Bits Kill	
IC Life	100,000 Programming cycles, 10 years data retention		
Read distance	Average reading distance >4m (Reader and Environment Dependent)		

2. Mechanical Dimensions

NO.	Item	Parameter(mm)	Tolerance	Parameter(in.)
1	Antenna Width	70.00 mm	± 0.20 mm	2.756 in
2	Antenna Length	9.50 mm	± 0.20 mm	0.374 in
5	Antenna Pitch	15.88 mm	± 0.50 mm	0.625 in
6	Antenna to PET (Top)	6.25 mm	± 1.00 mm	0.246 in
7	Antenna to PET (Bottom)	6.25 mm	± 1.00 mm	0.246 in
8	PET Width	82.50 mm	± 1.00 mm	3.248 in
15	Interleaf Width	25.00 mm	± 1.00 mm	0.984 in
55	Ink-dot Size	6.00 mm	± 2.00 mm	0.236 in
58	Ink-dot to Product Edge(Right)	2.21 mm	± 2.00 mm	0.087 in
59	Ink-dot to Product Edge(Top)	35.00 mm	± 2.00 mm	1.378 in
60	Core inner diameter	152.40 mm	± 1.00 mm	6.000 in
61	Reel Outer diameter	Based on the actual shipment quantity		

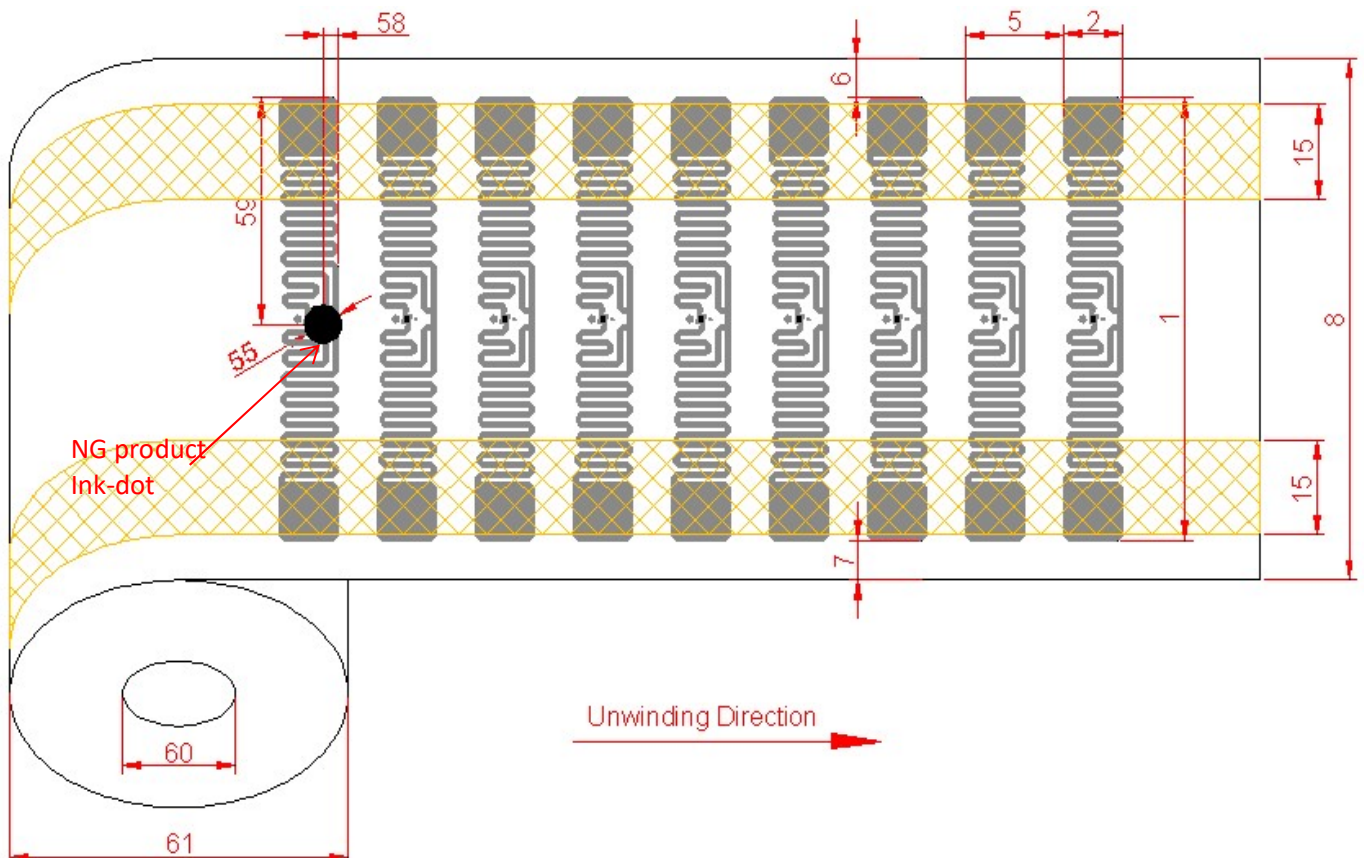

3. Dry inlay Structure

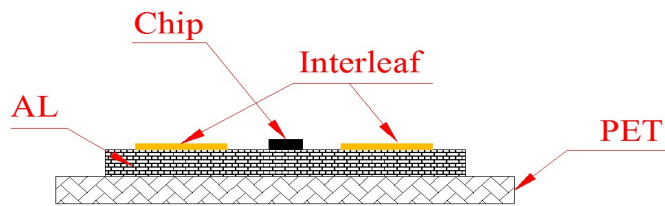

Chip	Silicon	150 $\mu\text{m} \pm 10\mu\text{m}$
Antenna AL	Aluminum etching	10 $\mu\text{m} \pm 3\mu\text{m}$
Antenna PET	Transparent PET	50 $\mu\text{m} \pm 3\mu\text{m}$
Interleaf	Kraft (Chip protected paper)	50 ~ 60 μm

4. Environment Requirement

Operating Temperature/Humidity	-0~60°C / 20%~80% RH	
Storage Temperature/Humidity	20~30°C / 20%~60% RH	
Shelf Life	1 year in anti-static bag at 20~30°C / 20% ~60% RH	
ESD Voltage Immunity	2 kV (HBM)	
Bending Diameter	> 50mm	

5. Delivery Details

Appearance	Single row reel form	
Quantity	20500 \pm 500 pcs/Roll; 1 Rolls/Carton	Based on the actual shipment quantity
Weight	To be determined	
Final inspection	100 %, known faulty ones marked	
Delivery yield	\geq 99%	

Packaging Photograph



AllGood-Group reserves the right for modifying the specification data without notice in advance!