


UD – 10

UHF Gen2



Hid compliant

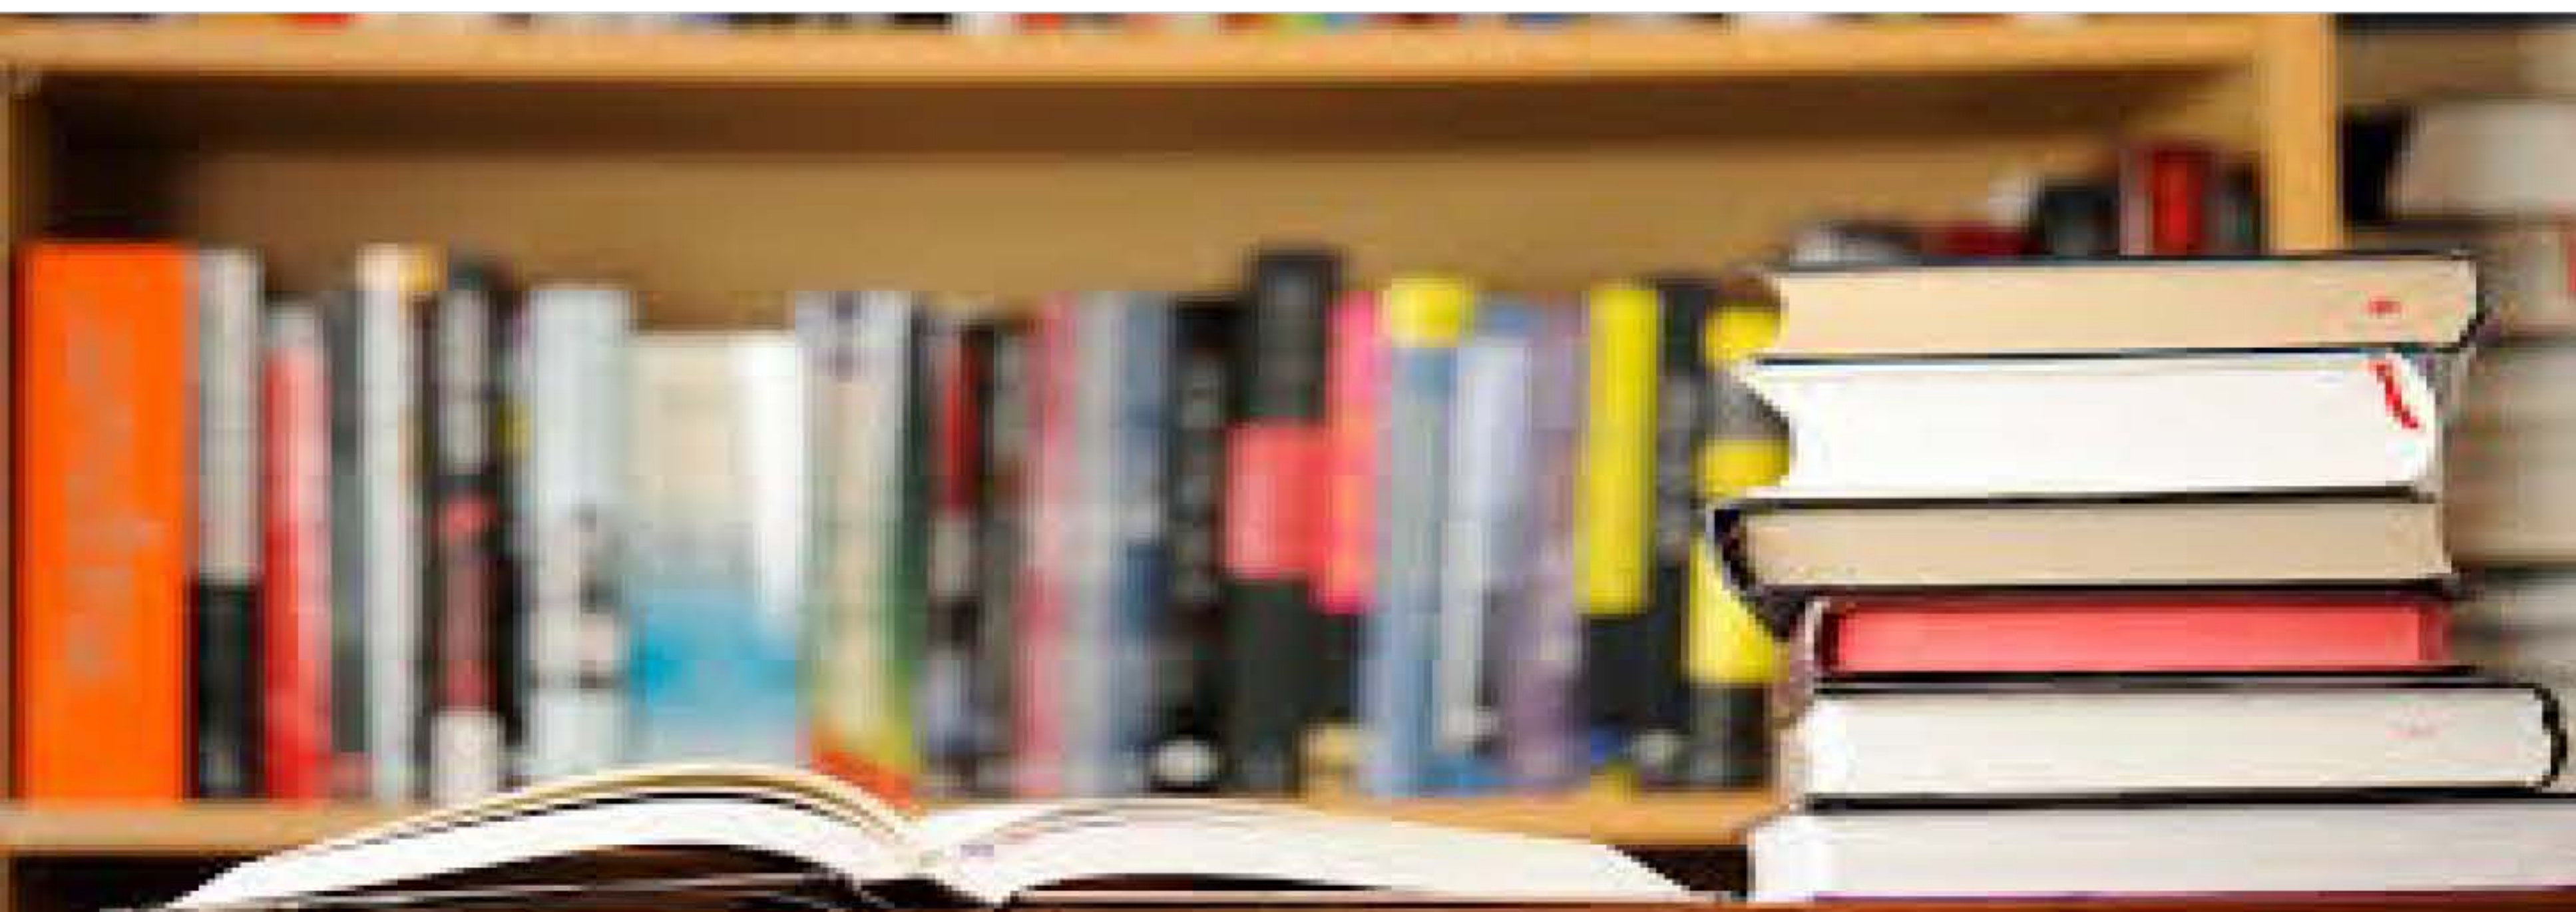

Applications

- Tag issuance
- Document issuance
- File Issuance
- Certificate Issuance
- And more...

Features

- Support ISO18000-6C EPC Gen2
- Support USB HID compliant
- Low voltage
- Controlled read distance within 8cm
- Superb coverage with microstrip antenna or near field antenna at customer's choice



Model	UD - 10	
Physical Characteristics	Dimensions	107 (W) × 107 (L) × 23 (H) mm
	Weight	400g
Environment	Operating Temp	-20°C to 55°C (-4°F to 131°F)
	Storage Temp	-40°C to 80°C (-40°F to 176°F)
	Humidity	10% to 95%
	Casing	IP54
Antenna Selections: Microstrip Antenna (120 × 120 × 4)mm / Near Field Antenna (110 × 40 × 1.6)mm	Polarization	RHCP / Linear
	Peak Gain	6 dbi / 4 dbi
	Beam Width	>40 MHz / >200 MHz
	VSWR Ratio	1.5:1.0 dBi / 1.5:1.0 dBi
	Axial Ratio	< 2.0 Db
Power	External 5 VDC (70mAh @sleep mode; 150mAh @ operating mode)	
Frequency Ranges	902 or 928 MHz band or 856-868Mhz	
RF power control	20-30dBm	
Tag Air Interfaces	EPC Class 1 Gen 2	
Communication Interface	USB (HID compliant);	
Reader Range	>1cm - 8cm tag and antenna dependent	

For more information:



Shenzhen AllGood Sci & Tech Co., Ltd.

An AllGood-Group Company, Choose AllGood, Choose All Good.

Address: Huichao technology building, Xixiang street Jin Hai road, Baoan district, Shenzhen

www.allgood-group.cn

www.allgood-rfid.com