


1. Performance Specifications


RFID Chip	Impinj/Monza 4E		
Protocol	ISO/IEC 18000-6C, EPCglobal Class 1 Gen 2		
Operating Frequency	860~960MHz		
Operating Mode	Passive(Battery free)		
Memory	48 bit TID, Up to 496 bit EPC, 128 bit User Memory	32Bits Access, 32Bits Kill	
IC Life	100,000 Programming cycles, 10 years data retention		
Read distance	Average reading distance > 0.3m (Reader and Environment Dependent)		

2. Mechanical Dimensions

NO.	Item	Parameter(mm)	Tolerance	Parameter(in.)
1	Antenna Width	22.00 mm	± 0.20 mm	0.866 in
2	Antenna Length	8.00 mm	± 0.20 mm	0.315 in
5	Antenna Pitch	20.00 mm	± 0.50 mm	0.787 in
6	Antenna to PET (Top)	19.00 mm	± 1.00 mm	0.748 in
7	Antenna to PET (Bottom)	19.00 mm	± 1.00 mm	0.748 in
8	PET Width	60.00 mm	± 1.00 mm	2.362 in
9	Mark Width	3.00 mm	± 0.20 mm	0.118 in
10	Mark Length	3.00 mm	± 0.20 mm	0.118 in
11	Mark to PET (Top)	15.00 mm	± 0.20 mm	0.591 in
12	Mark to Antenna (Top)	1.00 mm	± 0.20 mm	0.039 in
15	Interleaf Width	15.00 mm	± 1.00 mm	0.591 in
55	Ink-dot Size	6.00 mm	± 2.00 mm	0.236 in
58	Ink-dot to Product Edge(Right)	0.00 mm	± 2.00 mm	0.000 in
59	Ink-dot to Product Edge(Top)	14.62 mm	± 2.00 mm	0.576 in
60	Core inner diameter	152.40 mm	± 1.00 mm	6.000 in
61	Reel Outer diameter	≤305Based on the actual shipment quantity		

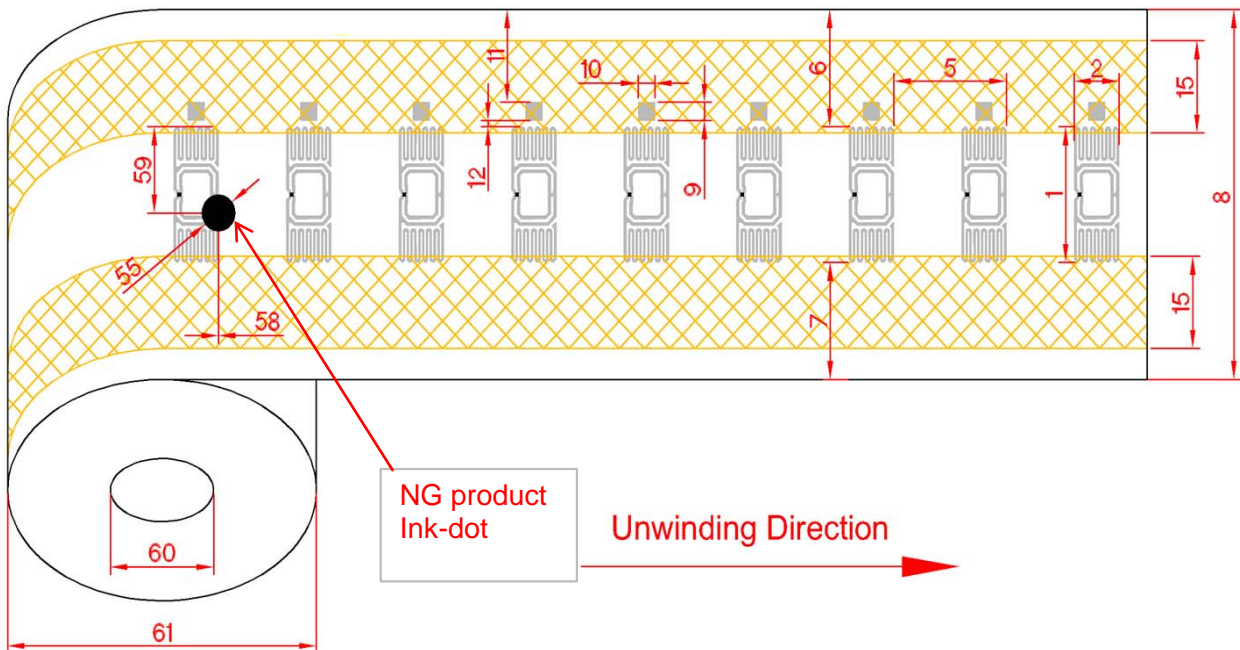

3. Dry inlay Structure

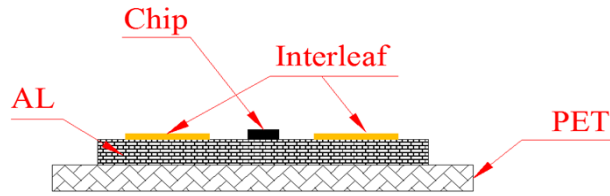

Chip	Silicon	100 μ m \pm 10 μ m
Antenna AL	Aluminum etching	10 μ m \pm 3 μ m
Antenna PET	Transparent PET	50 μ m \pm 3 μ m
Interleaf	Kraft (Chip protected paper)	50 ~ 60 μ m

4. Environment Requirement

Operating Temperature/Humidity	-0 \sim 60 $^{\circ}$ C / 20% \sim 80% RH	
Storage Temperature/Humidity	20 \sim 30 $^{\circ}$ C / 20% \sim 60% RH	
Shelf Life	1 year in anti-static bag at 20 \sim 30 $^{\circ}$ C / 20% \sim 60% RH	
ESD Voltage Immunity	2 kV (HBM)	
Bending Diameter	> 50mm	

5. Delivery Details

Appearance	Single row reel form	
Quantity	15000 \pm 300 pcs/Roll; 2 Rolls/Carton	Based on the actual shipment quantity
Weight	To be determined	
Final inspection	100 %, known faulty ones marked	
Delivery yield	\geq 99%	

Packaging Photograph



AllGood-Group reserves the right for modifying the specification data without notice in advance!