


1. Performance Specifications

RFID Chip	Impinj/Monza R6	
Protocol	ISO/IEC 18000-6C, EPCglobal Class 1 Gen 2	
Operating Frequency	860~960MHz	
Operating Mode	Passive(Battery free)	
Memory	48 bit TID, Up to 96 bit EPC, 0 bit User Memory	32Bits Access, 32Bits Kill
IC Life	100,000 Programming cycles, 10 years data retention	
Read distance	Average reading distance > 6m (Reader and Environment Dependent)	


2. Mechanical Dimensions

NO.	Item	Parameter(mm)	Tolerance	Parameter(in.)
1	Antenna Width	68.00 mm	± 0.20 mm	2.677 in
2	Antenna Length	14.00 mm	± 0.20 mm	0.551 in
20	Wet inlay Width	73.50 mm	± 0.20 mm	2.894 in
21	Wet inlay Length	21.20 mm	± 0.50 mm	0.835 in
25	Wet inlay Pitch	25.40 mm	± 0.50 mm	1.000 in
26	Antenna to PET (Left)	3.20 mm	± 1.50 mm	0.126 in
27	Antenna to PET (Right)	3.20 mm	± 1.50 mm	0.126 in
28	Antenna to PET (Top)	2.75 mm	± 1.50 mm	0.108 in
29	Antenna to PET (Bottom)	2.75 mm	± 1.50 mm	0.108 in
30	Wet inlay Edge to Liner Edge (Top)	3.25 mm	± 2.00 mm	0.128 in
31	Wet inlay Edge to Liner Edge (Bottom)	3.25 mm	± 2.00 mm	0.128 in
32	Wet inlay Corner Radius	1.60 mm	± 0.20 mm	0.063 in
33	Wet inlay Long arc radius	1236.00 mm	± 0.20 mm	48.661 in
53	Liner Width	80.00 mm	± 1.00 mm	3.150 in
55	Ink-dot Size	4.00 mm	± 2.00 mm	0.157 in
58	Ink-dot to Product Edge(Right)	10.50 mm	± 2.00 mm	0.413 in
59	Ink-dot to Product Edge(Top)	36.50 mm	± 2.00 mm	1.437 in
60	Core inner diameter	76.20 mm	± 1.00 mm	3.000 in
61	Reel Outer diameter	≤210(Based on the actual shipment quantity)		

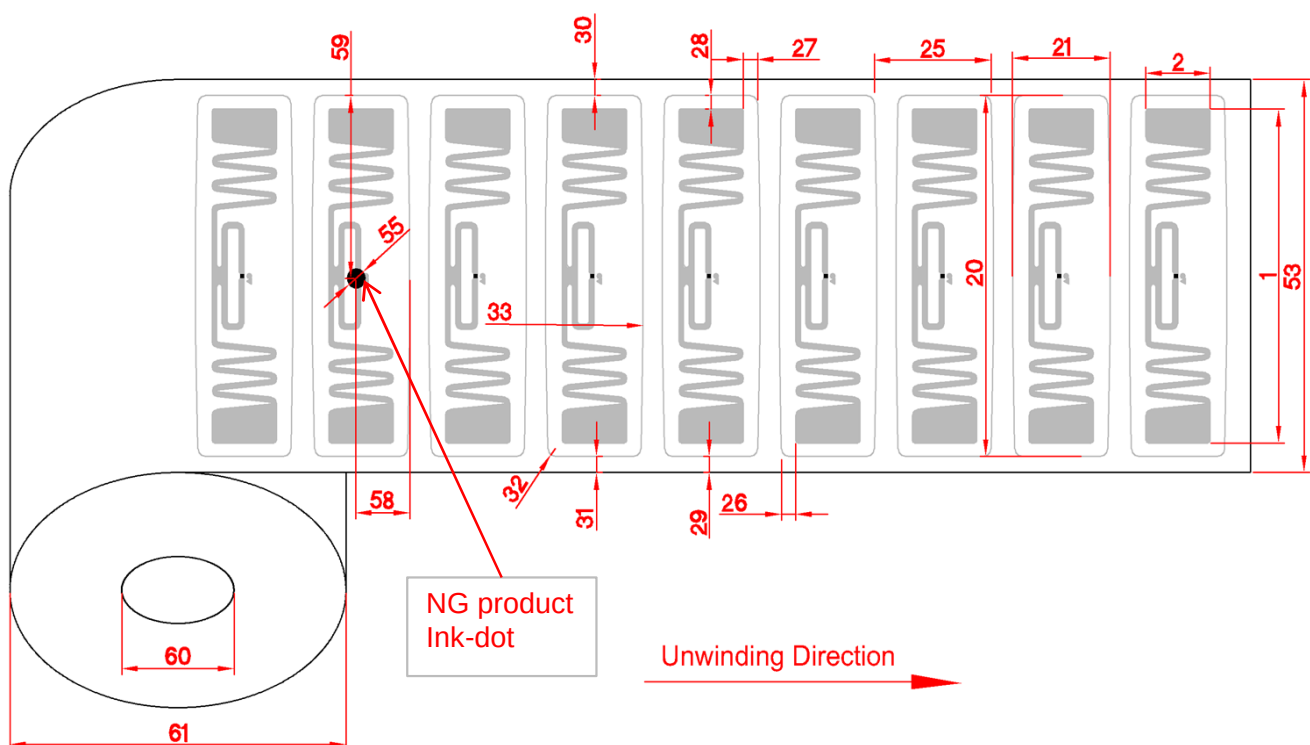



3. Clean wet inlay Structure

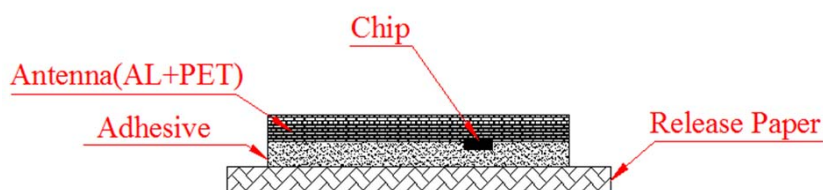

Antenna	Aluminum etching	PET: 50 μ m $\pm$ 3 μ m; AL: 10 μ m $\pm$ 3 μ m
Adhesive	Acrylic emulsion	19g/m ² $\pm$ 5g/m ²
Release Paper	White glassine paper	61g/m ² , 55 μ m $\pm$ 5 μ m

4. Environment Requirement

Operating Temperature/Humidity	-0 $\sim$ 60 $^{\circ}$ C / 20% $\sim$ 80% RH	
Storage Temperature/Humidity	20 $\sim$ 30 $^{\circ}$ C / 20% $\sim$ 60% RH	
Shelf Life	1 year in anti-static bag at 20 $\sim$ 30 $^{\circ}$ C / 20% $\sim$ 60% RH	
ESD Voltage Immunity	2 kV (HBM)	
Bending Diameter	> 50mm	

5. Delivery Details

Appearance	Single row reel form	
Quantity	5000 $\pm$ 100 pcs/Roll; 8 Rolls/Carton	Based on the actual shipment quantity
Weight	To be determined	
Final inspection	100 %, known faulty ones marked	
Delivery yield	$\geq$ 99%	

Packaging Photograph



AllGood-Group reserves the right for modifying the specification data without notice in advance!